



AmericanBiltrite
Flooring

Interdeco



Declare.

ABPURE | IMAGINE | OCCUPANCY READY RUBBER SHEET

ABPURE **N**fuse It's PURE Science.

ABPURE Nfuse

It's PURE Science.



Easy to Clean & Disinfect

- Tested with EPA List-N disinfectants approved for use against SARS-Cov-2
- Superior color, stain and tarnish resistance
- Consult our white paper on the reaction of repeated disinfection protocols on resilient flooring at: american-biltrite.com/flooring



A Sustainable Choice

- Declare & Red List Free
- PVC free, chlorine free, phthalate free, no formaldehyde, and crystalline silica free
- FloorScore® certified for best indoor air quality
- EPD Type III

Declare.

Interdeco




Exceptional Colorfastness

- Patented formulation that avoids color fading
- Best colorfastness and UV stability, meeting ASTM F 1515 requirements
- 10-year colorfastness guarantee

Clean & Crisp Colors

- 36 colors
- Pure white
- Clean beiges and crisp blues
- Available in tile and sheet
- Custom colors on demand: no problem!



Occupancy Ready

- No initial set-up, stripping, sealing, or waxing after installation and beyond
- Lower maintenance costs and reduced installation time
- No harmful impact on water waste management and better indoor air quality



Informed flooring decisions based on science.



Interdeco™

More than ever, institutions rely on rigorous cleaning and disinfection programs to limit the spread of infections in the built environment. Choosing durable and easy-to-clean flooring becomes essential.

ABPURE® Nfuse® was tested with EPA List-N recommended disinfectants and showed the most positive response, being the least prone to tarnish with increased disinfection protocols compared to other rubber floors.


Learn more in our white paper: "The response of rubber floor coverings to disinfectants":

www.american-biltrite.com/flooring

Nfuse[®]
technology

ABPURE Nfuse is an occupancy ready rubber flooring allowing to save time and money during installation and beyond - and is a better choice for environmental sustainability.

BEFORE

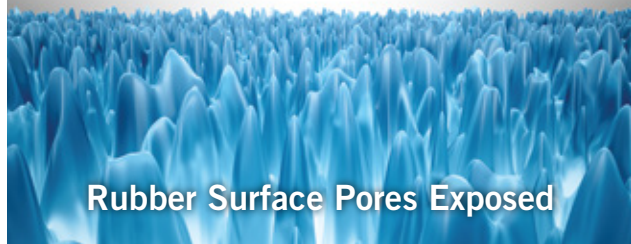

Rubber Surface Pores Exposed

WITH NFUSE TECHNOLOGY



Penetrates and Seals Surface Pores

Nfuse technology is an overall product treatment technology that penetrates into the pores and seals the flooring.


- > No initial set-up required
- > Immediate access
- > No waxing, stripping or sealant, for the lifetime of the floor, which means no negative impact on wastewater systems and better indoor air quality
- > Excellent stain and tarnish resistance

ABPURE NFUSE IMAGINE | 36 Colors


> All colors shown available in rolls of 5 feet (nominal) wide and up to 50 feet long

> Gauge: 2 or 3 mm


> Emboss: Smooth paper finish




ABS-34
Glaciar




ABS-38
Steel




ABS-23
Anthracite




ABS-94
Forget-me-not




ABS-31
Gainsboro Valley



ABS-33
Pebble Beach




ABS-37
Battleship Gray




ABS-90
Baby Blue




ABS-41
Linen



ABS-30
Sand Castle




ABS-32
Appalachian Trail




ABS-83
Pistachio



ABS-15
Snowstorm



ABS-35
Ash Gray




ABS-20
Starry Night




ABS-45
Wheat

IMAGINE chip design also available in tile format including:

- > Smooth profile (ABT), 2 or 3 mm thickness, 18" x 18" and 36" x 36" formats
- > Hammered (ABM) and Slate (ABF) profiles, 3mm thickness, 18" x 18" and 36" x 36" formats




ABS-95
Electric Blue




ABS-68
Rich Lavender




ABS-73
Banana Candy



ABS-74
Buff




ABS-92
Aquamarine




ABS-98
Blue Lagoon




ABS-75
Orangerine




ABS-52
Terracotta



ABS-85
Olive Green




ABS-87
Tundra




ABS-53
Land of Fire



ABS-55
Fire Engine Red




ABS-36
Tan



ABS-39
Camouflage Green




ABS-57
Chestnut




ABS-58
Espresso

COLOR COORDINATED COLLECTIONS

A complete **STAIR TREAD SYSTEM** featuring solid colors in regular stair tread specification or with risers, with or without visually impaired strips in Round and Hammered profiles.




ABS-72
Limoncello



ABS-51
Capuchin




ABS-66
Doll House



ABS-56
Shiraz




COORDINATED SOLID COLORED TILES: Solid colored landing tiles that coordinate with stair tread programs available in 3 mm thickness in 18''x18'' and 36''x36'' formats in Round (ABR) and Hammered (ABA) profiles.

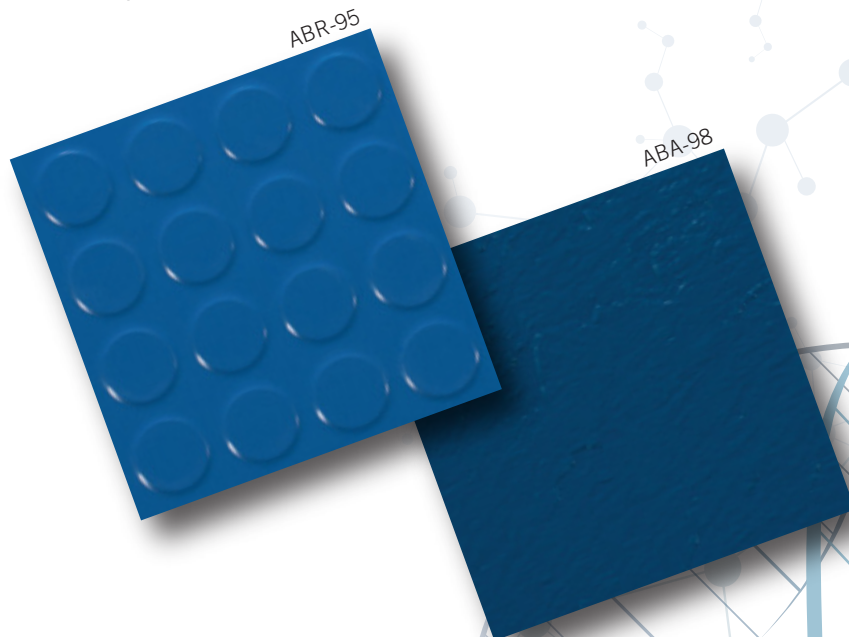


CUSTOM COLORS


For special projects, custom colors can be created that perfectly match your design needs.
Minimum order quantity required.




PANTONE
273 C



SW 6970
Venture Violet
Interior / Exterior



SW 6889
Stirring Orange
Interior / Exterior



SW 6897
Sundance
Interior / Exterior

Choose any base color and then choose up to 3 chip colors from our 36 standard colors.



American Biltrite Flooring

ABPURE® IMAGINE WITH NFUSE TECHNOLOGY

TECHNICAL SPECIFICATIONS

Gauge	2 mm / 3 mm	0.080" / 0.118"
Size	1,5 m x 15,2 m	60" nominal x 50'
Product Classification		
ASTM F 1859	Rubber Sheet Floor	Type 1 (Homogeneous)
ASTM D 2047	Static Coefficient of Friction (leather)	≥ 0.5
ASTM D 3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles)	Pass
ASTM E 648	Critical Radiant Flux CRF (W/cm ²)	≥ 0.45
ASTM E 662	Smoke Density	≤ 450
ASTM E 989 / E492	Sound Absorption (with a suspended ceiling)	IIC 59
ASTM F 925	Chemical Resistance	Exceeds
ASTM F 970	Static Load (modified at 2,000 psi)	≤ 0.005"
ASTM F 1514	Heat Stability	ΔE ≤ 8.0
ASTM F 1515	Light Stability	ΔE ≤ 8.0
ASTM G 21	Antimicrobial Resistance Test	Pass (28 days)
Indoor Air Quality (IAQ):		FloorScore Certified by SCS Certification
Volatile Organic Compounds (VOC's)		Registration Number SCS-FS-01492
Adhesives:	AD-777	Regular traffic
	AD-590	Heavy rolling loads, under patients' beds, non-acclimatized entrance zones
Limited Wear Warranty		10 years
Resistance to oils and greases	ABPURE® is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.	
Antimicrobial	IMPORTANT: All our ABPURE rubber flooring, through its composition and without the use of antimicrobial chemicals, does not promote microbial growth.	

Rubber Tiles also available (ABT code). Consult the ABPURE Tile binder or website for specifications.


Please note that technical website documents prevail.

® / ABPURE is a registered trademark of American Biltrite

® / Nfuse is a registered trademark of American Biltrite

american-biltrite.com

Interdeco™

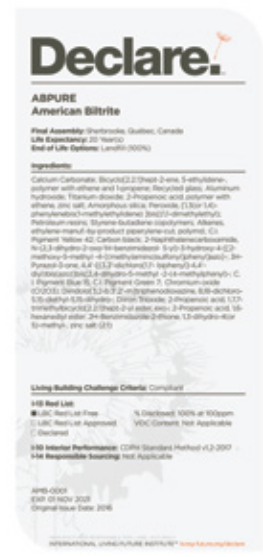

American Biltrite, 200 Bank Street, Sherbrooke, Quebec, Canada J1H 4K3
 To order samples: flooring@american-biltrite.com | 1.800.437.8743 | Fax 1.800.810.5731 | Technical Services: 1.800.479.0190